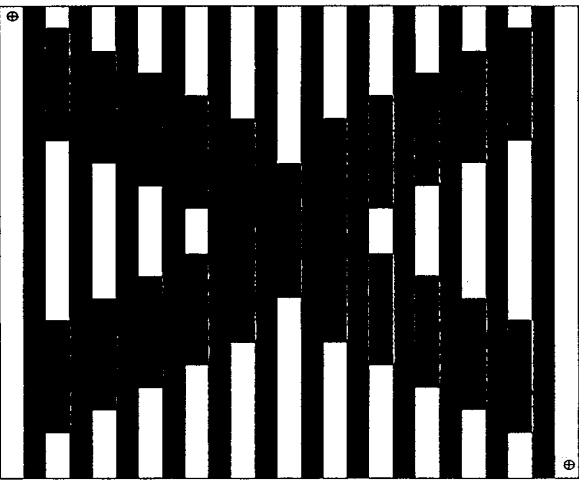
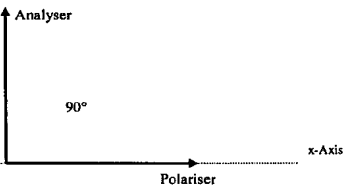


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : G02B 5/30, B42D 15/10, G02F 1/1337, G02B 27/28</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/29878</p> <p>(43) International Publication Date: 25 May 2000 (25.05.00)</p>
<p>(21) International Application Number: PCT/IB99/01810</p> <p>(22) International Filing Date: 10 November 1999 (10.11.99)</p> <p>(30) Priority Data: 9825023.6 13 November 1998 (13.11.98) GB</p> <p>(71) Applicant (for all designated States except US): ROLIC AG [CH/CH]; Innere Güterstrasse 2, CH-6301 Zug (CH).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): MOIA, Franco [IT/CH]; Eggstrasse 24A, CH-4402 Frenkendorf (CH).</p> <p>(74) Agent: NEVILLE, Peter, Warwick; BTG International Limited, 10 Fleet Place, Limeburner Lane, London EC4M 7SB (GB).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	
<p>(54) Title: OPTICAL COMPONENT</p> <p>(57) Abstract</p> <p>An optical component contains two or more hidden images for authentication and antiforgery purposes. The images are successively revealed and concealed when the optical component is held between two polarisers and one of them is rotated. The optical component comprises one or more optical retarder(s) in which the images are embedded in separate adjacent stripes or areas, each image being associated with a different mode of interaction with polarised light. Instead of two polarisers, one will suffice if the component is mounted on a reflector.</p>		
<p>Magnified version of an optical component (picture II)</p>		
		
<p>5 Appearance of the pixels: stripes I : grey to brownish stripes II: whitish and black</p> <div style="text-align: center;">  </div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakistan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

OPTICAL COMPONENT

The invention relates to an optical component containing a normally hidden image.

5 A particular use of the components according to the invention is in the field of protection against forgery and copying and simple yet unambiguous document authentication.

The increasingly high-quality copying techniques which are becoming available make it increasingly difficult to safeguard banknotes, credit cards, securities, identity cards and the like against forgery. Furthermore, counterfeit branded products (even including counterfeit pharmaceuticals) and copies of copyright-protected products, for example compact discs, computer software and electronics chips, are being produced and distributed worldwide. The increasing number of forgeries necessitates new authentication elements which are safeguarded against forgery and can be identified both visually and by machine.

In the field of copy-protecting banknotes, credit cards etc., there are already a considerable number of authentication elements. Depending on the value of the document to be protected, very simple or relatively highly complex elements are employed. Some countries are content to provide banknotes with metal strips which come out black on a photocopy. Although this prevents them from being photocopied, elements of this type are very easy to imitate. In contrast to this, there are also more complex authentication elements, for example holograms and cinegrams. Authentication elements of this type are based on the diffraction of light by gratings and need to be observed under different viewing angles in order to verify their authenticity. These diffracted elements produce three-dimensional images, colour variations or kinematic effects which depend on the angle of observation and have to be checked on the basis of predetermined criteria or rules. It is not practically possible to use machines for reading information, for example images or numbers, encoded using this technique. Furthermore, the information content of these elements is very

limited, and only an optical specialist will be capable of discriminating definitively between forgeries and an original.

A further consideration with diffractive optical effects is that these have also been used for consumer articles such as wrapping paper, toys and the like. The relevant production methods have therefore become widely known and are correspondingly straightforward to imitate.

Further to the diffractive elements mentioned above, other components are also known which are suitable for optimum copy protection. These include optical components, as disclosed for example by EP-A-689084 or EP-A-689065, that is to say components with an anisotropic liquid-crystal layer, which latter has local structuring of the molecular orientation.

These components are based on a hybrid layer structure which consists of an orientation layer and a layer which is in contact with it and consists of liquid-crystal monomers or pre-polymers cross-linked with one another. In this case, the orientation layer consists of a photo-oriented polymer network (PPN) - synonymous with LPP used in other literature - which, in the oriented state, through a predetermined array, defines regions of alternating orientations. During the production of the liquid-crystal layer structure, the liquid-crystal monomers or pre-polymers are zonally oriented through interaction with the PPN layer. This orientation which, in particular, is characterised by a spatially dependent variation of the direction of the optical axis, is fixed by a subsequent cross-linking step, after which a cross-linked, optically structured liquid crystal monomer or pre-polymer (LCP) with a pre-established orientation pattern is formed. Under observation without additional aids, both the orientation pattern itself and the information written into the cross-linked LCP layer are at first invisible. The layers have a transparent appearance. If the substrate on which the layers are located transmits light, then the LCP orientation pattern or the information which has been written become visible if the optical element is placed between two polarisers. If the birefringent LCP layer is located on a reflecting layer, then the pattern, or the corresponding information, can be made visible using only a single polariser which is held over the element. LPP/LCP authentication elements

make it possible to store information, virtually without restriction, in the form of text, images, photographs and combinations thereof. In comparison with prior art authentication elements, the LPP/LCP elements are distinguished in that the authenticity of the security feature can be verified even by a layman since it is not first
5 necessary to learn how to recognise complicated colour changes or kinematic effects. Since LPP/LCP authentication elements are very simple, reliable and quick to read, machine-readable as well as visual information can be combined in the same authentication element.

However, there remains the risk that, in the course of time, forgers will be able
10 to master this technique.

In the components described above, one pictorial element is present (whether visible or invisible).

It would be desirable to improve the security or entertainment value of such a component.

15 According to the present invention, an optical component comprises one or more retarder(s) in which are embedded a plurality of images, the images being so arranged that, at any point in the plane of the component, an element of not more than one image is present, each image being associated with a different interaction with polarised light. This association can be achieved in various ways, for example, each
20 image is embedded in patterned retarder(s) (one or more), each of them having patterns with different optical axis.

The invention also provides a viewing system, comprising a source of polarised light, a component as set forth above, through which the polarised light can travel, and an analyser (in practice, a polarising sheet) for light which has traversed
25 the component, the analyser being rotatable about the axis of the direction of travel of the light. The source of polarised light may be a polarising sheet applied to the surface of the component.

The different images may be contained in successive parallel stripes, each preferably narrower than the eye can resolve, into which the surface area of the

component is divided; if these are n images, any one image will usually be represented on every n th stripe.

Such an optical component has the surprising property, valuable in the fields of entertainment, document authentication and forgery countermeasures, that simply by rotating a polariser (= the analyser), a plurality of different images, all visible in ordinary light, can be seen one after the other. Previously, it was possible to reveal only one hidden image in this way. However, all the advantages of the "one hidden image" technology, as described for example in EP-A-689065, PCT/IB98/00687 or CH 841/98, can be maintained.

The invention will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 shows magnified a first optical component according to the invention, manufactured with two retarders, in its appearance when viewed through an analyser in the orientation indicated in the Figure;

Figure 2 shows the same component as Figure 1, in its appearance when viewed through an analyser in the orientation indicated in Figure 2, and

Figure 3 shows the same component as Figure 1, in its appearance when viewed through an analyser in the orientation indicated in Figure 3 leading to the 'negative' counterpart of the image shown in Figure 1;

Figure 4 shows the same optical component as Figure 1, in its appearance when viewed through an analyser in the orientation indicated in Figure 4 leading to the 'negative' counterpart of the image shown in Figure 2;

Figure 5 shows a striped photo mask which includes the information of picture I. This striped photo mask is needed for (this example of) the production process of the optical component.

Figure 6 shows a striped photo mask which includes the information of a second image, picture II. This photo mask is optional in the production process of the optical component.

Figure 7 shows a striped but otherwise completely unpatterned photo mask, in other words including no picture information. This striped photo mask is used in the production process of the optical component.

Figure 8 shows a photo mask which reflects picture II. This mask does not include any stripes as shown in Figures 5, 6 and 7.

Figure 9 shows the contrast dependence of each image (here 2 images) related to the analyser angle with respect the optical component. The analyser angle is interrelated to the x-axis (when the analyser is parallel to the x-axis then the angle is 0°). At specific analyser angles peaks of maximum contrasts are reached.

Figure 10 shows the contrast dependence of each image (here 2 images) related to the analyser angle in case of a second optical component according to the invention and described in the following Figures, this second optical component being manufactured with 1 retarder. The analyser angle is interrelated to the x-axis (when the analyser is parallel to the x-axis then the angle is 0°). At specific analyser angles peaks of maximum contrasts are reached.

Figure 11 shows, magnified, the second optical component in its appearance when viewed through an analyser in the indicated orientation;

Figure 12 shows the second optical component in its appearance when viewed through an analyser in the indicated orientation different from Figure 11;

Figure 13 shows a striped photo mask which includes the 'positive' ('positive' means dark information patterns on bright background) information of picture I of the second optical component.

Figure 14 shows a striped photo mask which includes the 'negative' ('negative' means bright information patterns on dark background) information of picture I.

Figure 15 shows a striped photo mask which includes the 'positive' information of a second image, picture II.

Figure 16 shows a striped photo mask which includes the 'negative' information of a second image, picture II. The photo masks of Figures 13-16 are all needed in this example of the production process of the optical component.

Figure 17 shows schematically an optical component according to the invention, working in the reflective mode.

Example 1:

5 An optical component according to Figures 1, 2, 3 and 4 is made by applying a layer of suitable orientable linearly photopolymerisable (LPP) material such as cinnamic acid derivatives or ferulic acid derivatives illustrated for instance in patent publications EP-A-611786, WO 96/10049 and EP-A-763552 to a transparent substrate. This layer with a thickness of about 50nm is exposed through a photo mask, shown schematically in Figure 5, to polarised light of different polarisation directions. The photo mask is of alternative adjacent opaque (II) and in-principle-transparent (I) stripes which, when projected onto the layer of LPP material, have a width of 1/8mm each, which is smaller than the eye can resolve. The stripes (I) are themselves blacked out in parts, to leave the image of an upright cross. The illumination sequence for this first LPP layer is shown in Table 3 with ultimate result shown in Table 1: the angle α of the linear polarised light with a suitable wavelength in respect to the x-Axis travelling through the bright picture areas of stripes I (Figure 5) is $+13.5^\circ$ (illumination step 1); the picture illustrated in Figure 5 is an upright cross but any image can be used. Then, this mask is replaced by the photo mask shown in Figure 7. 15 The opaque stripes (II) of both masks coincide, but the former unexposed areas of stripes I of Figure 5 will be now exposed at an angle α of -13.5° (illumination step 2); finally this mask is removed and a third illumination step parallel to the x-Axis ($\alpha = 0^\circ$) is applied to expose the stripes II of Figure 5 (illumination step 3). After these 3 illumination steps all areas of the first LPP layer has been exposed to polarised light of a suitable wavelength. These exposures cause polymerisation, in respectively 25 different preferred alignments.

Thereafter, this first LPP layer is coated with a cross-linkable liquid crystal monomer or pre-polymer mixture (LCP) which shows birefringence, such as LCP mixture M_{LCP} described in more detail later. (M_{LCP} has an optical anisotropy Δn of 0.13 leading to a film thickness of $1.5\mu m$). The LCP material adopts the alignment (if 30

any) of the immediately underlying region of the LPP layer. The whole is then exposed to unpolarised (isotropic) light of a suitable wavelength to crosslink the LCP material (illumination step 4 of Table 3).

Then, a second LPP layer (film thickness about 50nm) is coated directly on the former LCP layer. Similar to the first LPP layer further 4 exposures (illumination steps 5 to 8 in Table 3) to polarised light of a suitable wavelength are applied to this second LPP layer: the angle α of the linear polarised light in respect to the x-Axis travelling through the bright picture areas of stripes I of the photo mask (Figure 5) is +31.5° (illumination step 5). Then, this mask is replaced by the photo mask shown in Figure 7 and the former unexposed areas of stripes I of Figure 5 will now be exposed at an angle α of -31.5° (illumination step 6). Then, the current (Fig. 7) mask is replaced by the photo mask without any stripes of Figure 8; the picture II illustrated in Figure 8 is a diagonal cross but any image can be used. The bright areas of stripes II which were not exposed yet are illuminated with polarised light at an angle α of +45° (illumination step 7). Finally also this mask is removed and all areas which were not exposed before are illuminated by polarised light parallel to the x-Axis ($\alpha = 0^\circ$) (illumination step 8). These exposures cause polymerisation, in respectively different preferred alignments.

Thereafter, this second LPP layer is coated with a cross-linkable liquid crystal monomer or pre-polymer mixture (LCP) which shows birefringence, such as LCP mixture M_{LCP} (M_{LCP} has an optical anisotropy Δn of 0.13 leading to a film thickness of 1.5 μ m). Again, the LCP material adopts the alignment (if any) of the immediately underlying region of the LPP layer. The whole is then exposed to unpolarised (no mask necessary) light of a suitable wavelength to crosslink the LCP material (illumination step 9).

The various retarder layers may have the same (as here) or different optical retardations $\Delta n d$.

This completes the manufacture of the optical component, which in normal light is-transparent.

In use, the optical component will be examined for authenticity in the following way.

It is placed on a light box emitting linearly polarized light, and appears transparent in transmission.

5 To check it, it is viewed through a rotatable sheet carrying a polarizing grating; such sheets are known as analysers.

In summary, because of the different modes of interaction of the two images with polarised light, as the analyzer is rotated, the upright cross (stripes I, Figure 1) appears and disappears, to be replaced by the diagonal cross (stripes II, Figure 2),
10 which also disappears on continued rotation of the analyzer. It is easy to verify whether or not a document of unknown authenticity displays two different images when inspected this way. The dependence of the contrast on the analyser angle is also represented in Figure 9.

In more specific detail, the appearance of images depends on various angles
15 and retardation's as set forth in the following tables, in which the symbols have the following meaning:

δ_1	Optical axis of first LCP layer;
δ_2	Optical axis of second LCP layer;
x-axis:	Axis of polarising grating of inspection arrangement; $\alpha = 0^\circ$ 20 means parallel to the x-Axis
x, y:	colour co-ordinates indicate the position in the Chromaticity Diagram; for example, stripes I in Figure 2 appear grey to brownish; the colour co-ordinates of these stripes are calculated as $x=0.3684$ and $y=0.3609$ leading to such a slightly 25 coloured appearance described as brownish.
normed brightness:	1.000 = brightness of inspection light as viewed through polarisers and analyser arranged parallel, no retarder present.
$\Delta n d_1, \Delta n d_2$	Optical retardations of the LCP layers ($\Delta n d_1 = \Delta n d_2 = 0.2\mu\text{m}$)
d_1, d_2 :	Thickness of LCP retarder layers ($d_1 = d_2 = 1.5\mu\text{m}$).

30

Table 2 shows calculated values of the feasible contrast ratios and colours which can be achieved with the optical component described in Example 1.

Example 2:

In another example according to the invention, it is possible to make a similar secure component with only one retarder layer. This component is examined for authenticity by the procedure already described. Upon rotating the analyser, peaks of maximum contrast are obtained at specific rotation angles, at each of which a respective one of the (otherwise hidden) images becomes visible (Figure 10).

An optical component according to Figures 11 and 12 (their 'negative' counterparts are not shown here, but appear - similar to Example 1 - when the analyser angle to the x-axis is 0° and -45° , respectively) is made by applying a layer of suitable orientable linearly photo-polymerisable (LPP) material such as cinnamic acid derivatives or ferulic acid derivatives illustrated for instance in patent publications EP 611786, WO 96/10049 and EP 763552 to a transparent substrate. This layer with a thickness of about 50nm is exposed through a photo mask, shown schematically in Figure 13, to polarised light of different polarisation directions. The photo mask is of alternative adjacent opaque (II) and in-principle-transparent (I) stripes which, when projected onto the layer of LPP material, have a width of 1/8mm each which is smaller than the eye can resolve (same resolutions show masks illustrated in Figures 14, 15 and 16). The stripes (I) are themselves blacked out in parts, to leave the image of a character '3'. The illumination sequence for this LPP layer is: the angle α of the linear polarised light with a suitable wavelength in respect to the x-axis travelling through the bright picture areas of stripes I (Figure 13) is $+45^\circ$ (illumination step 1); the picture illustrated in Figure 13 is a character '3' but any image can be used. Then, this mask is replaced by the photo mask shown in Figure 14. This mask is - except the opaque stripes II - exactly the 'negative' counterpart of the mask shown in Figure 13. The opaque stripes (II) of both masks coincide, but the former unexposed areas of stripes I of Figure 13 will be now exposed at an angle α of 0° (illumination step 2); then a third mask (Figure 15) is applied including the image information of picture II; the picture illustrated in Figure 15 is a character '4', but any image can be used. The angle α of the linear polarised light in respect to the x-axis travelling through the bright picture areas of stripes II of the photo mask

(Figure 15) is $+22.5^\circ$ (illumination step 3). Then, this mask is replaced by the photo mask shown in Figure 16 and the former unexposed areas of stripes II of Figure 15 will now be exposed at an angle α of $+67.5^\circ$ (illumination step 4). These exposures cause polymerisation, in respectively different preferred alignments.

5 Thereafter, this LPP layer is coated with a cross-linkable liquid crystal monomer or pre-polymer mixture (LCP) which shows birefringence, such as mixture M_{LCP} (M_{LCP} has an optical anisotropy Δn of 0.13 leading to a film thickness of $1.5\mu m$). The LCP material adopts the alignment (if any) of the immediately underlying region of the LPP layer. The whole is then exposed to unpolarised (no mask necessary) light
10 of a suitable wavelength to crosslink the LCP material (illumination step 5).

This completes the manufacture of the optical component, which in normal light is transparent.

In use, the optical component will be examined for authenticity in the following way.

15 It is placed on a light box emitting linearly polarised light, and appears transparent in transmission.

To check it, it is viewed through a rotatable sheet carrying a polarising grating; such sheets are known as analysers.

In summary, because of the different modes of interaction of the various
20 images patterns with polarised light, as the analyser is rotated, the character '3' (stripes I, Figure 13) appears and disappears, to be replaced by the character '4' (stripes II, Figure 14), which also disappears on continued rotation of the analyser. It is easy to verify whether or not a document of unknown authenticity displays two different images when inspected this way.

25 When placing or attaching the optical components described in Examples 1 and 2 on top of a reflector which maintains the polarisation direction of incident light, and when using a polariser which is rotatable about the axis of the direction of travel of the light which has traversed the polariser and the optical component, such light is reflected at said reflector and traverses a second time the optical component and said
30 polariser (schematically shown in Figure 17). Then similar images as seen in the


transmissive mode illustrated in Example 1 and 2 are observed: by rotating said polarizer, peaks of maximum contrasts for each image are obtained at specific rotation angles of the polarizer, enabling, at each such angle, visualisation of a respective image not otherwise visible; the image appears bluish/white or violet/whitish with relative poor contrasts because the optical retardations and its optical axis were not optimised for the reflective operation mode.

The production of a PPN (= LPP) and LCP layer which can be used according to the invention will be described still by way of example, in more detail below.

1. Production of a PPN layer

Suitable PPN materials are described for instance in patent publications EP-A-611786, WO 96/10049 and EP-A-763552, such as cinnamic acid derivatives or ferulic acid derivatives. For the foregoing Examples, the following PPN material was chosen:


Polymer:

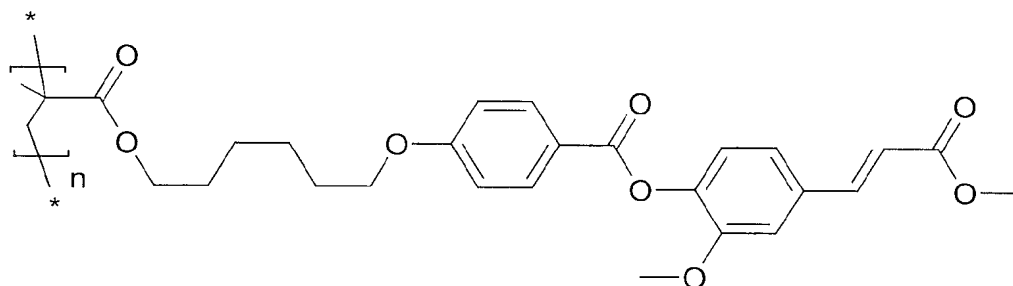

A glass plate was spin-coated with a 2 percent strength solution of the PPN material in cyclopentanone for one minute at 2000 rpm. The layer was then dried for 5 to 10 minutes at 120 °C on a hotplate. The layer was then exposed to linearly polarized light, Hg high-pressure lamp for 20 to 405 seconds (depending on the strength of the lamp and on the number of LPP/LCP layers of the optical component) at room temperature. The layer was then used as an orientation layer for liquid crystals.

2. Mixture M_{LCP} of cross-linkable LC monomers for the LCP layer.

In the examples, the following diacrylate components were used as cross-linkable LC monomers:

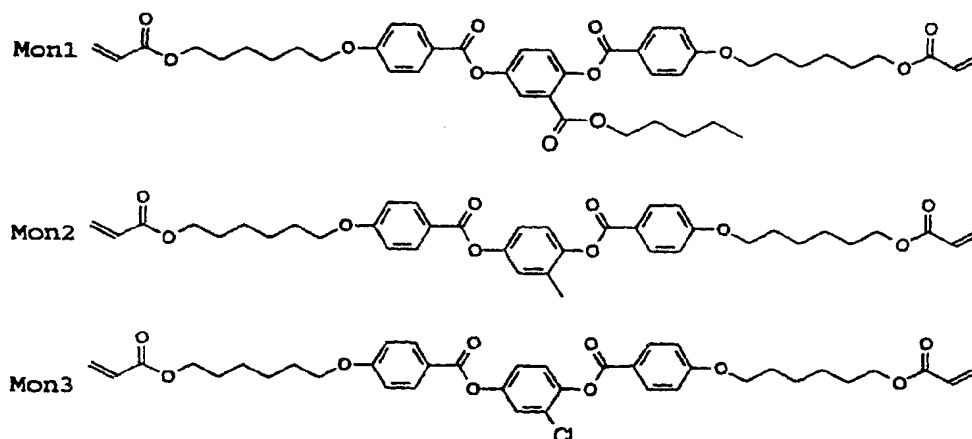

Using these components, a supercoolable nematic mixture M_{LCP} with particularly low melting point ($T_m \sim 35^\circ\text{C}$) was developed, making it possible to prepare the LCP layer at room temperature.

The diacrylate monomers were present with the following composition in the mixture:

Mon1	80%
Mon2	15%
Mon3	5%

In addition a further 2% of the Ciba-Geigy photoinitiator IRGACURE (trade mark) was added to the mixture.

The mixture M_{LCP} was then dissolved in anisol. By means of the M_{LCP} concentration in anisol, it was possible to adjust the LCP layer thickness over a wide range. Especially for the examples of optical components described in this patent, desired retardations $\Delta n d$ of $0.2\mu\text{m}$ could be achieved.

For photoinitiated cross-linking of the LC monomers, the layers were exposed to isotropic light from a xenon lamp for about 5 to 30 minutes (depending on the strength of the lamp) in an inert atmosphere.

The optical effects described above, as well as the corresponding layer structures and material compositions, represent no more than a choice from many possibilities according to the invention, and may in particular be combined in a wide variety of ways in order to develop authenticating elements.

5 Thus, it is of course possible for any other kind of birefringent layer than the LCP layer described to be used to produce an optical effect that can be employed in optical components, for example for authentication elements.

 It is furthermore possible for the examples described above, to use not a PPN orientation layer but a different orientation layer which, according to the desired
10 optical property and resolution, has the same or similar properties to a PPN layer. It is also conceivable to produce the orientation required for a retarder layer using a correspondingly structured substrate. A structured substrate of this type can, for example, be produced by embossing, etching and scratching.

15

Table 1: Arrangement of the optical axis of the LCP layers and optical appearance of the optical element. Optical Retardations Δn_1 and Δn_2 of the LCP-Retarder Layers Δn_1 and $\Delta n_2 = 0.2\mu\text{m}$











	PICTURE I		PICTURE II	
				
				
Angle of x axis to polariser	0°	0°	0°	0°
Angle of x axis to analyser	45°	45°	90°	90°
Angle of x axis to δ_1	+13.5°	0°	+13.5°	0°
Angle of x axis to δ_2	+31.5°	+45°	+31.5°	+45°
Normed brightness	0.9925	0.5000	0.4859	0.8104
Colour co-ordinates x	0.3343	0.3334	0.3684	0.3062
y	0.3355	0.3333	0.3609	0.3186
Colour	white	white	whitish/brownish	white
Appearance of the pixel	BRIGHT	GREY	GREYISH	BRIGHT
				
Angle of x axis to polariser	0°	0°	0°	0°
Angle of x axis to analyser	45°	45°	90°	90°
Angle of x axis to δ_1	-13.5°	0°	-13.5°	0°
Angle of x axis to δ_2	-31.5°	0°	-31.5°	0°
Normed brightness	0.0052	0.5000	0.5000	0.0000
Colour co-ordinates x	0.2669	0.3334	0.3684	0.3334
y	0.1539	0.3333	0.3603	0.3333
Colour	ca. violet	white	whitish/brownish	white
Appearance of the pixel	DARK	GREY	GREYISH	DARK

Table 2: Contrasts



	PICTURE I 		PICTURE II 	
		overall effect		overall effect
Point on image	BRIGHT GREY	BRIGHT	GREY BRIGHT T	BRIGHT
Colour	white white	~white	whitish/ white brownish	~whitish
Normed brightness	0.993 0.500	0.747	0.486 0.810	0.648
Point on image	DARK GREY	DARK	GREY DARK	DARK
Colour	ca. violet white	~dark violet	whitish/ white brownish	~black
Normed brightness	0.005 0.500	0.253	0.500 0.000	0.250
Maximum contrast	199:1 1:1	3:1	1:1 >200:1	2.6:1


Table 3: Sequence of illumination steps with linear polarized and isotropic light to generate the optical component of Example 1 (picture in picture)

	Bright areas	Dark areas	Bright areas	Dark areas
	Substrate	Substrate	Substrate	Substrate
	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1
	Stripe mask (picture I)	Stripe mask I	Mask (picture II): mask not necessary	
Polariser angle to x axis	$\alpha = +13.5^\circ$	$\alpha = -13.5^\circ$	$\alpha = 0^\circ$	
Illumination steps no:	1	2	3	

	Substrate	Substrate	Substrate	Substrate
	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1
	LCP-layer	LCP-layer	LCP-layer	LCP-layer
Illumination step no: (isotropic light)	<		4	>

	Substrate	Substrate	Substrate	Substrate
	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1
	LCP-layer	LCP-layer	LCP-layer	LCP-layer
	LPP layer no. 2	LPP layer no. 2	LPP layer no. 2	LPP layer no. 2
	Stripe mask (picture I)	Stripe mask I	Mask (picture II)	Mask (picture II): not necessary
Polariser angle to x axis	$\alpha = +31.5^\circ$	$\alpha = -31.5^\circ$	$\alpha = +45^\circ$	$\alpha = 0^\circ$
Illumination steps no:	5	6	7	8

	Substrate	Substrate	Substrate	Substrate
	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1	LPP layer no. 1
	LCP-layer	LCP-layer	LCP-layer	LCP-layer
	LPP layer no. 2	LPP layer no. 2	LPP layer no. 2	LPP layer no. 2
	LCP-layer	LCP-layer	LCP-layer	LCP-layer
Illumination step no: (isotropic light)	<		9	>




CLAIMS

1. An optical component, comprising one or more retarder(s) in which is/are embedded a plurality of images, the images being so arranged that, at any point in the plane of the component, an element of not more than one image is present,
5 each image being associated with a different interaction with polarised light.
2. An optical component according to Claim 1, wherein there is a plurality of retarders in which the images are embedded, the retarders having the same or different retardation values $\Delta n d$.
3. An optical component, according to Claim 1 or 2, wherein the images are
10 embedded in one or more retarder(s) having specific image patterns each having a different optical axis from the other specific image patterns.
4. An optical component according to any preceding Claim, wherein the respective images are contained in alternate areas.
5. An optical component according to any preceding Claim, wherein the
15 respective images are contained in successive optionally parallel stripes.
6. An optical component according to Claim 4 or 5, wherein the areas or stripes are smaller or narrower than the eye can resolve enabling an optical component wherein one or more image(s) is/are (a) photographic image(s).
7. An optical component according to Claim 4, 5 or 6, wherein there are n images,
20 each respectively being represented on every n th stripe or n th area.
8. Element for protection against forgery and/or copying, characterized by an optical component according to any one preceding Claims.
9. A viewing system, comprising a source of polarised light, an optical
25 component according to any preceding Claim, through which component the polarised light can travel, and an analyser for light which has traversed the optical component, the analyser being rotatable about the axis of the direction of travel of the light; whereby, by rotating the analyser, peaks of maximum contrasts for each image are obtained at specific rotation angles of the analyser, enabling, at each such angle, visualisation of a respective image not
30 otherwise visible.

10. A system according to Claim 8, wherein the source of polarised light is a polarising sheet applied to the surface of the component.
11. A system accorded to Claim 9 or 10, wherein the analyser is a polarising sheet.
12. A viewing system, comprising a reflector which maintains the polarisation
5 direction of incident light, an optical element according to Claims 1 to 7 attached to said reflector, and a polariser which is rotatable about the axis of the direction of travel of the light, such that light which has traversed the polariser and the optical component is reflected at said reflector and traverses a second time the optical component and said polariser; whereby, by rotating
10 said polariser, peaks of maximum contrasts for each image are obtained at specific rotation angles of the polariser, enabling, at each such angle, visualisation of a respective image not otherwise visible.

Figure 2: Magnified version of an optical component (picture II)

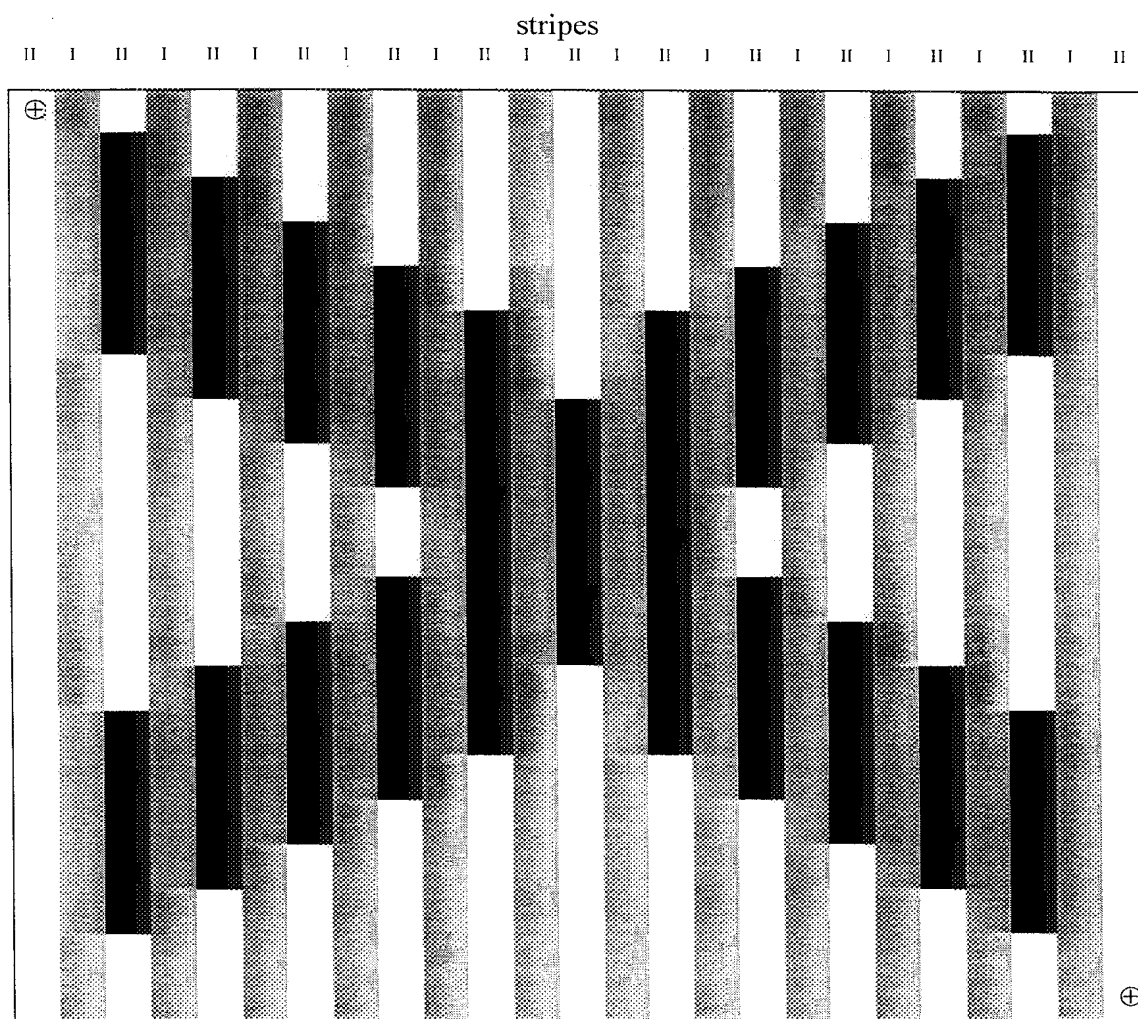

5

Appearance of the pixels: stripes I : grey to brownish
stripes II: whitish and black

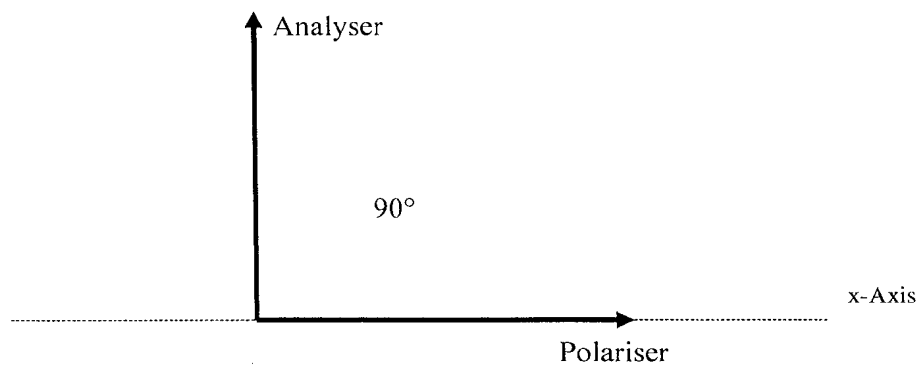


Figure 3: Magnified version of an optical component (picture II): 'negative counterpart' to Figure 1



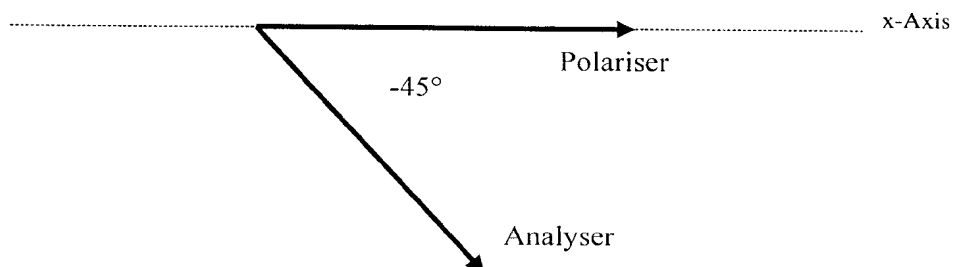


Figure 4: Magnified version of an optical component (picture II): ‘negative counterpart’ to Figure 2

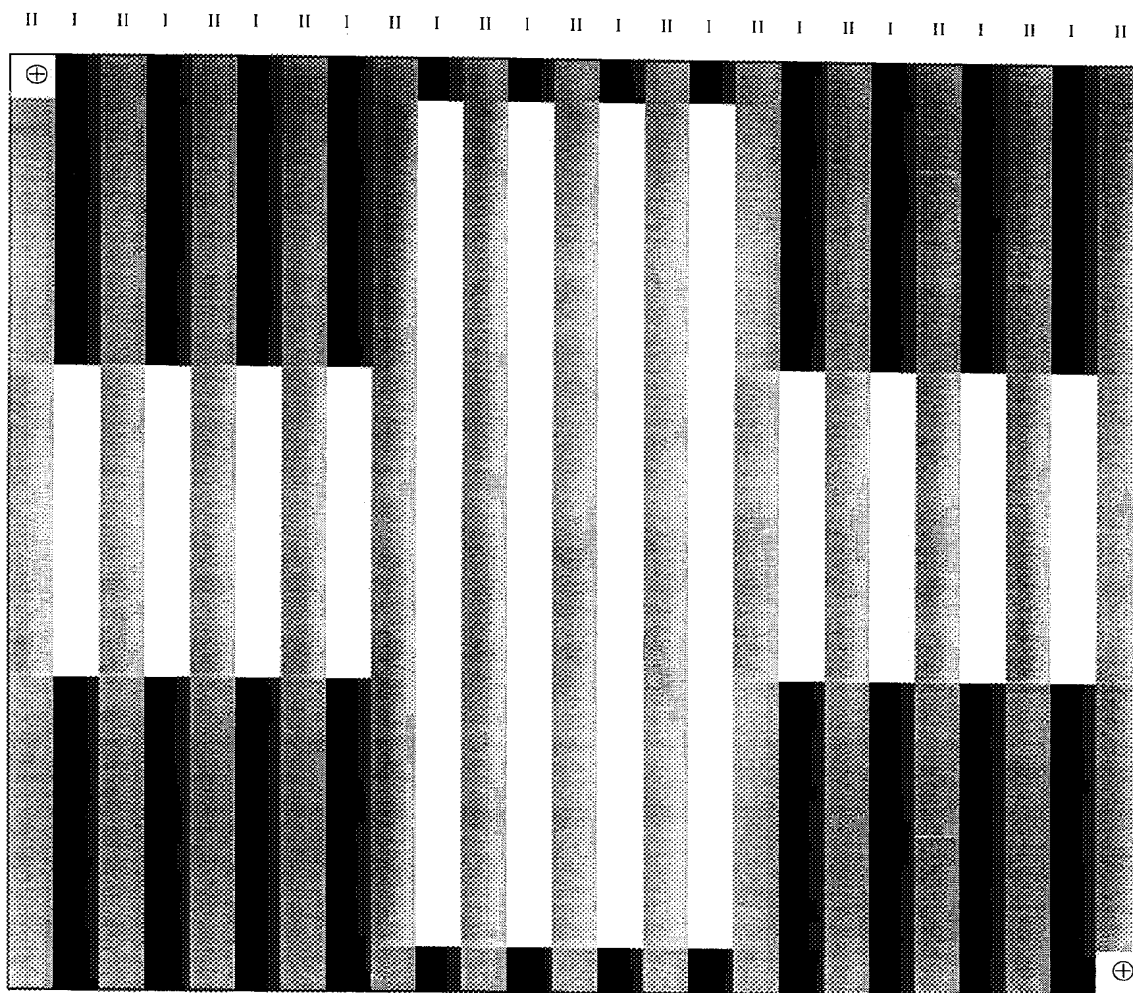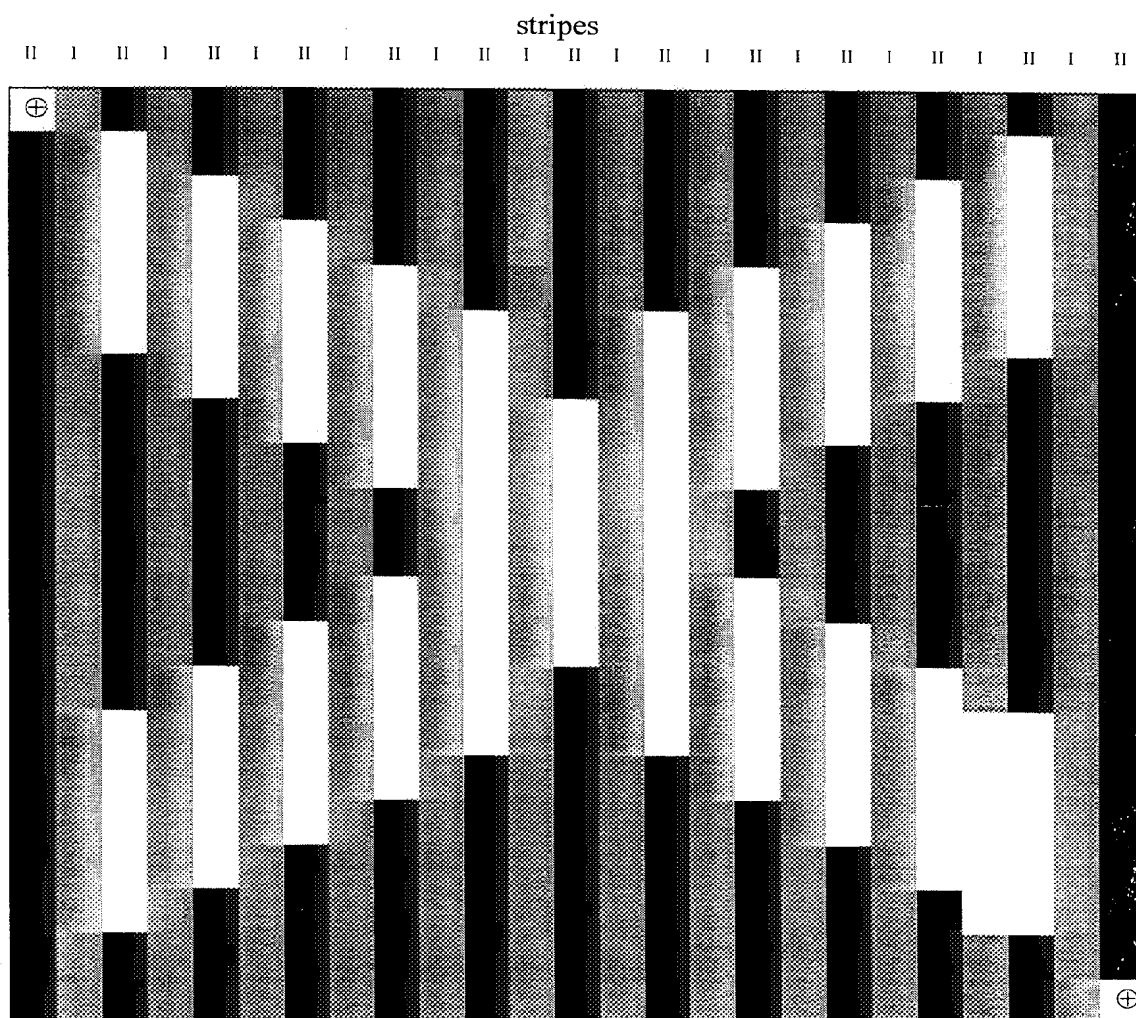

5

Appearance of the pixels: stripes I : grey
stripes II: white and 'brown'




Figure 5: Stripe photo mask (picture I); magnified

5

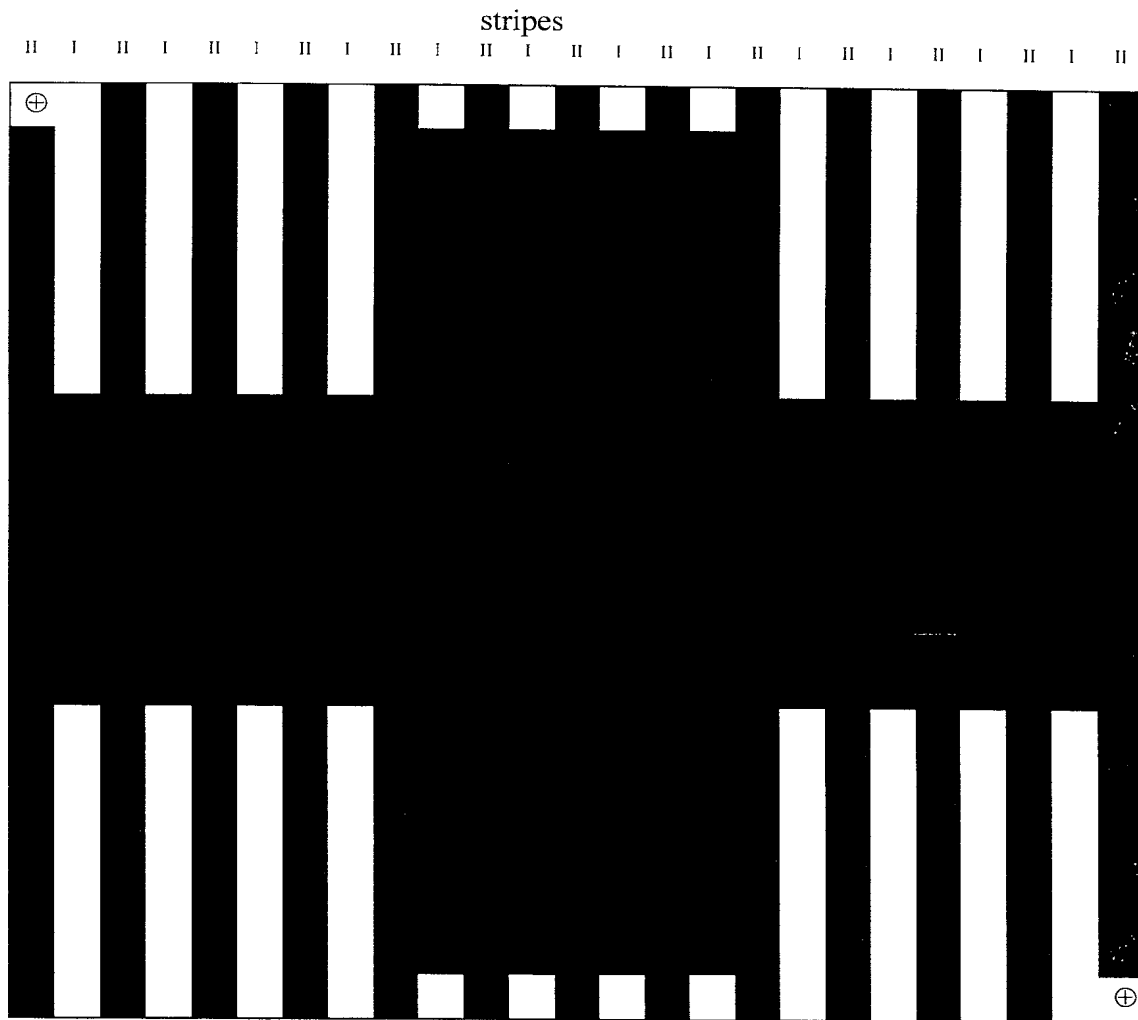


Figure 6: Stripe photo mask (picture II): not absolutely necessary to generate the optical component (magnified)

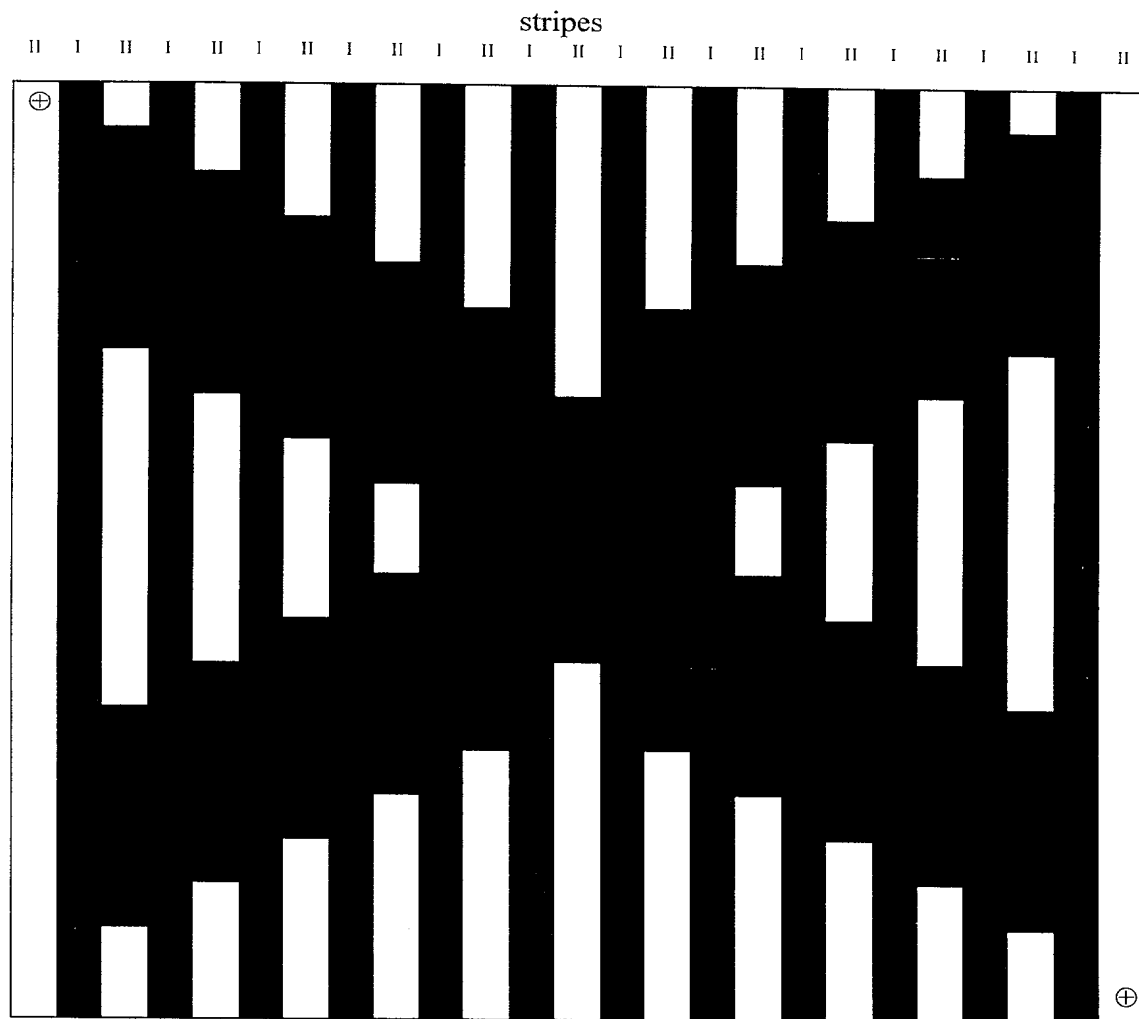


Figure 7: Stripe photo mask I; magnified

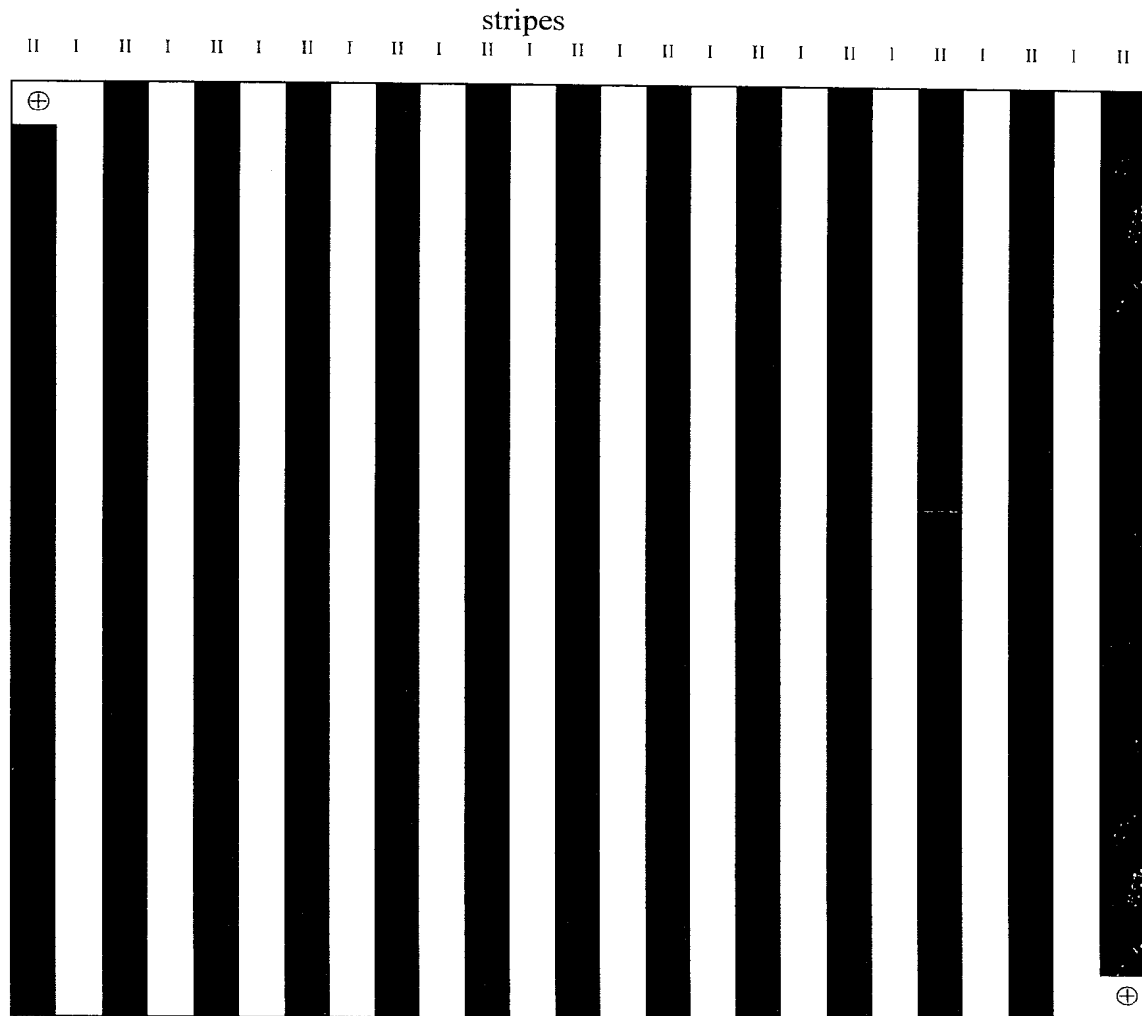


Figure 8: Photo mask (picture II); without stripes (magnified)

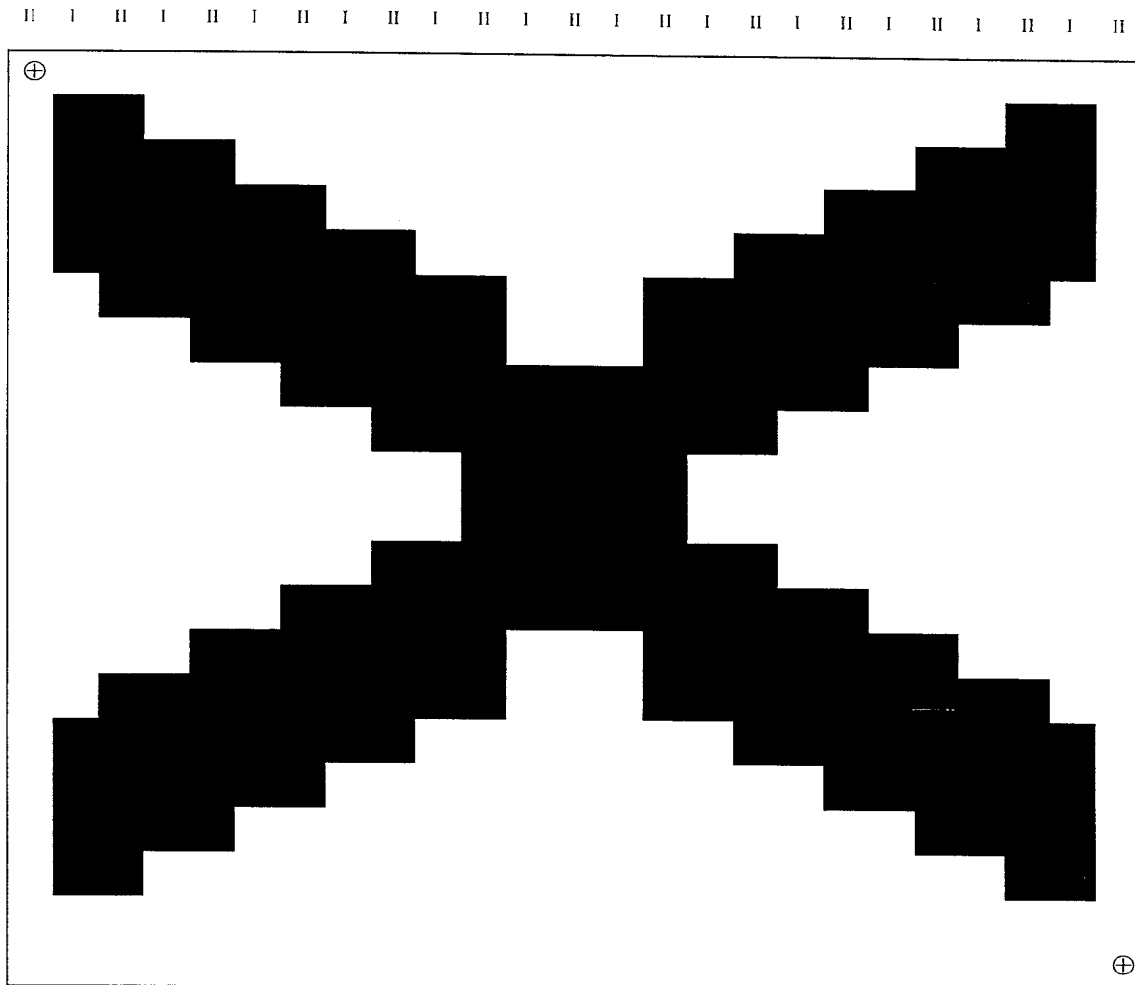


Figure 9: Picture in Picture manufactured with 2 retarder layers: Contrasts

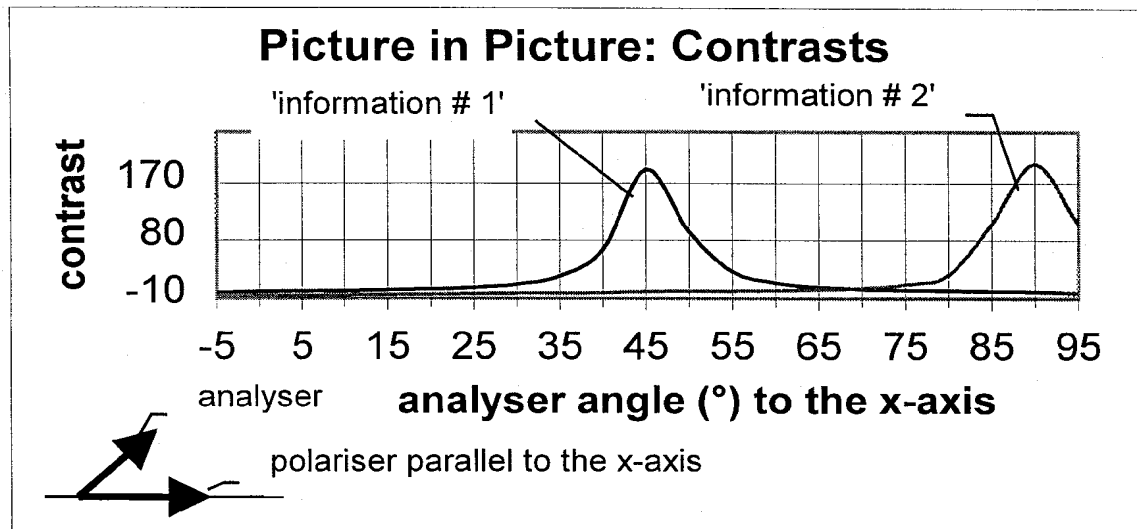


Figure 10: Picture in Picture manufactured with 1 retarder layer: Contrasts


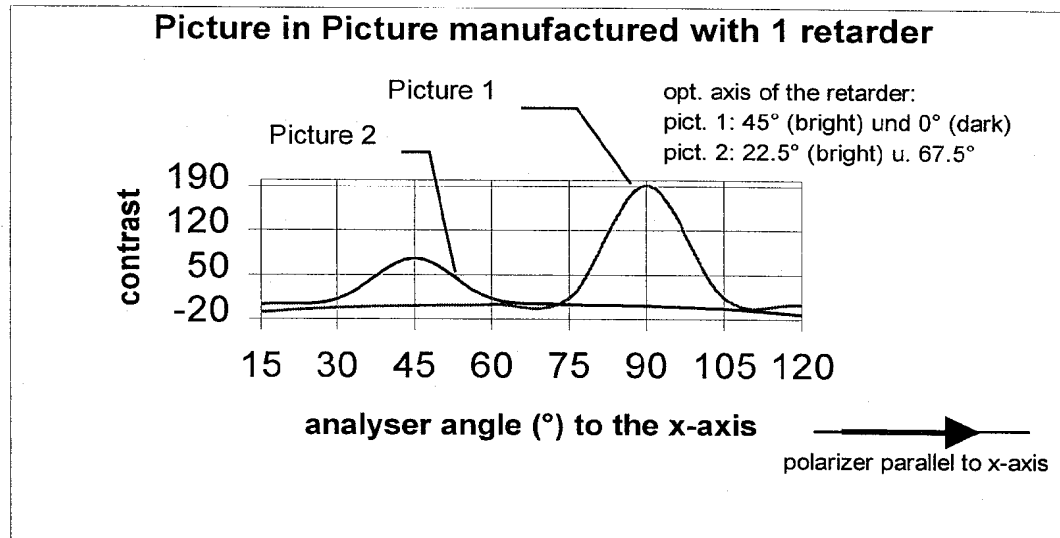


Figure 11: Magnified version of an optical component (picture I)

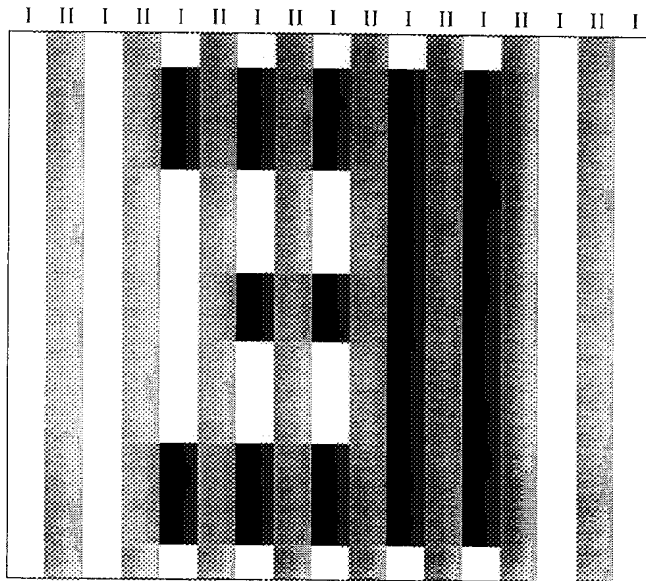

5


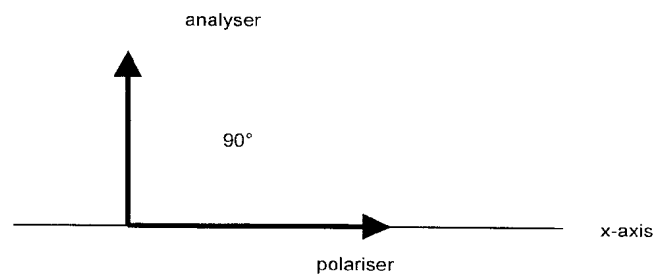


Figure 12: Magnified version of an optical component (picture II)

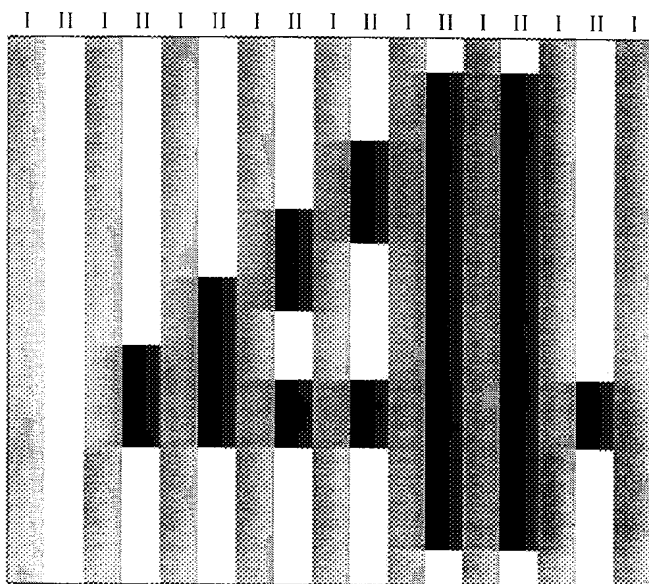

5

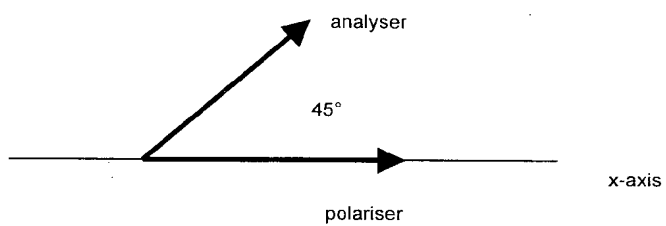


Figure 13: Magnified Stripe photo mask (picture I; positive)

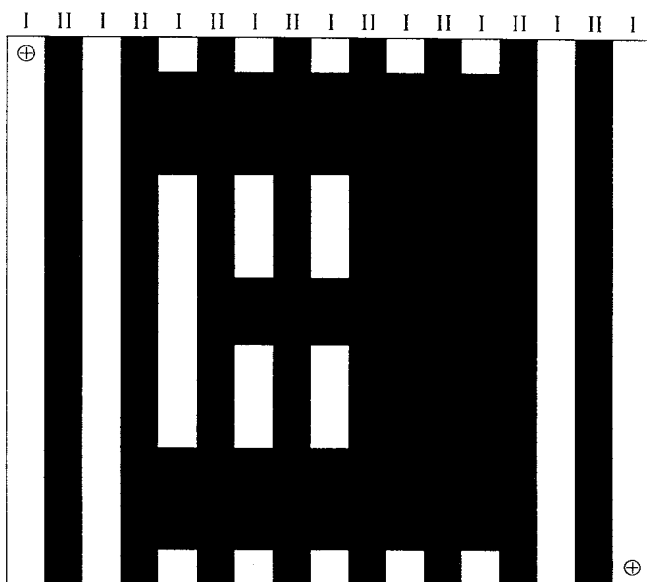


Figure 14: Stripe photo mask (picture I; negative); magnified

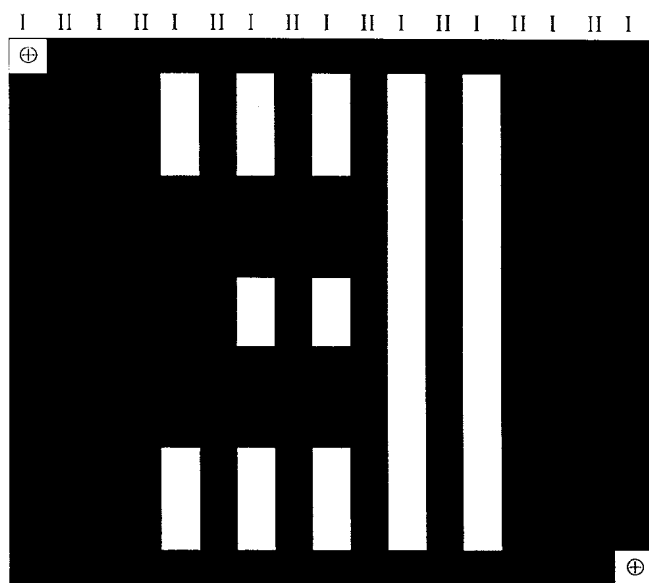


Figure 15: Stripe photo mask (picture II, positive); magnified

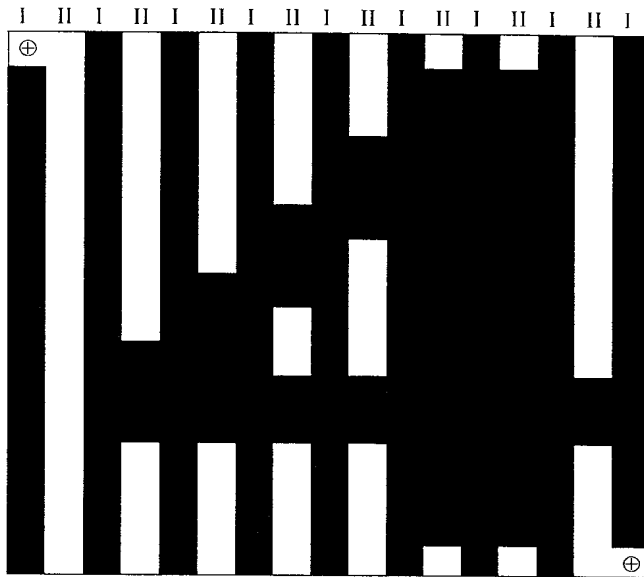


Figure 16: Stripe photo mask (picture II, negative); magnified


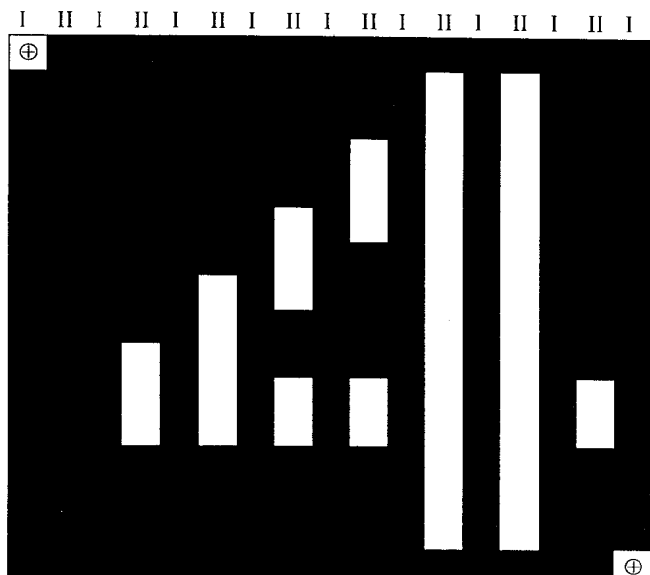


Figure 17: Optical Component working in the reflective mode

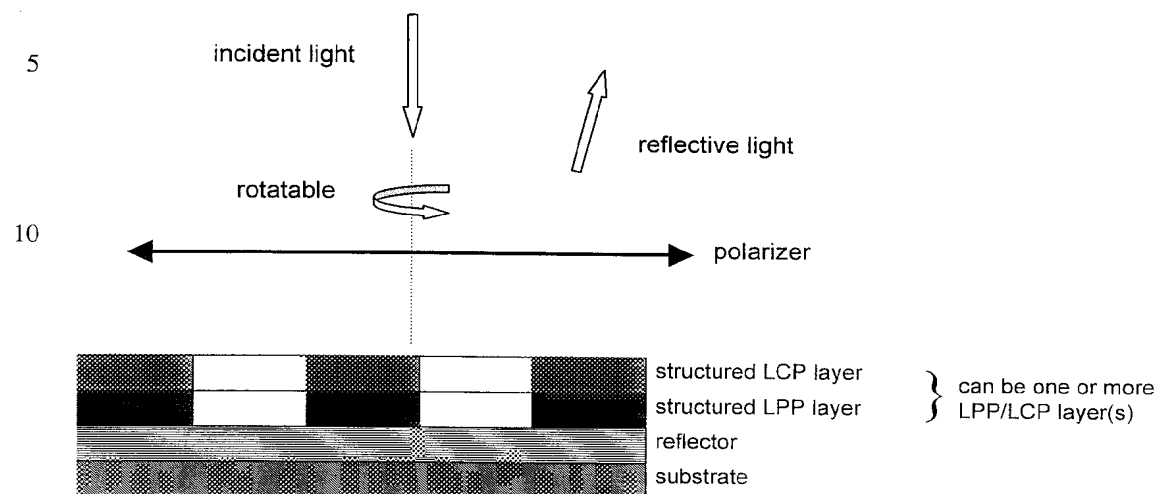

15

20

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 99/01810

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B5/30 B42D15/10 G02F1/1337 G02B27/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B B42D G02F B41M G03G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 268 906 A (PORTALS LTD) 26 January 1994 (1994-01-26) page 10, paragraph 2 -page 14, paragraph 1; figures 4-7 ---	1,4-12
A	US 4 220 705 A (AIZAWA TAKEO ET AL) 2 September 1980 (1980-09-02) column 4, line 26 -column 6, line 47; figures 1-4 ---	1-12
A	US 5 602 661 A (SCHADT MARTIN ET AL) 11 February 1997 (1997-02-11) cited in the application column 7, line 18 -column 9, line 52; figures 1-7 --- -/--	1-12

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 February 2000

Date of mailing of the international search report

14/02/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

THEOPISTOU, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 99/01810

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	EP 0 772 069 A (ROLIC AG) 7 May 1997 (1997-05-07) page 3, line 54 -page 4, line 5; figures 1,2 page 3, line 3 - line 41 ----	1-12
A	EP 0 689 065 A (HOFFMANN LA ROCHE) 27 December 1995 (1995-12-27) cited in the application page 3, line 3 - line 27; figure 1; example 3 ----	1,4,5, 8-12
A	US 5 101 296 A (BELL BILL) 31 March 1992 (1992-03-31) column 4, line 53 -column 6, line 6 column 6, line 38 -column 9, line 2 column 12, line 23 - line 34 column 13, line 44 -column 14, line 48; figures 1,2,4-8 ----	1-12
A	US 2 165 974 A (E H LAND) 11 July 1939 (1939-07-11) page 1, right-hand column, line 3 -page 3, left-hand column, line 29; figures 1-5 -----	1-12

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/IB 99/01810

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2268906 A	26-01-1994	AT 137174 T	15-05-1996
		BR 9306771 A	08-12-1998
		CA 2140880 A,C	03-02-1994
		DE 69302389 D	30-05-1996
		DE 69302389 T	12-09-1996
		DK 650413 T	13-05-1996
		EP 0650413 A	03-05-1995
		ES 2089829 T	01-10-1996
		FI 950275 A	23-01-1995
		WO 9402329 A	03-02-1994
		JP 7509190 T	12-10-1995
		PL 307180 A	15-05-1995
		SI 9300395 A	31-03-1994
		US 5678863 A	21-10-1997
US 4220705 A	02-09-1980	JP 1310128 C	26-03-1986
		JP 55018685 A	08-02-1980
		JP 60033246 B	01-08-1985
		AT 378610 B	10-09-1985
		AT 675978 A	15-01-1985
		CA 1107999 A	01-09-1981
		CH 633373 A	30-11-1982
		DE 2840777 B	20-12-1979
		FR 2432180 A	22-02-1980
		GB 2026713 A,B	06-02-1980
		IN 150699 A	20-11-1982
US 5602661 A	11-02-1997	CN 1096807 A	28-12-1994
		CN 1091458 A	31-08-1994
		DE 59403063 D	17-07-1997
		DE 59408097 D	20-05-1999
		EP 0611981 A	24-08-1994
		EP 0611786 A	24-08-1994
		HK 1007196 A	01-04-1999
		JP 2543666 B	16-10-1996
		JP 6289374 A	18-10-1994
		JP 6287453 A	11-10-1994
		US 5539074 A	23-07-1996
EP 0772069 A	07-05-1997	CN 1152134 A	18-06-1997
		JP 9179126 A	11-07-1997
		US 5903330 A	11-05-1999
EP 0689065 A	27-12-1995	CN 1116754 A	14-02-1996
		JP 8043804 A	16-02-1996
US 5101296 A	31-03-1992	NONE	
US 2165974 A	11-07-1939	NONE	